


Max II Dual Fogger

QUICK START Instructions

For detailed instructions, please consult the user's manual.

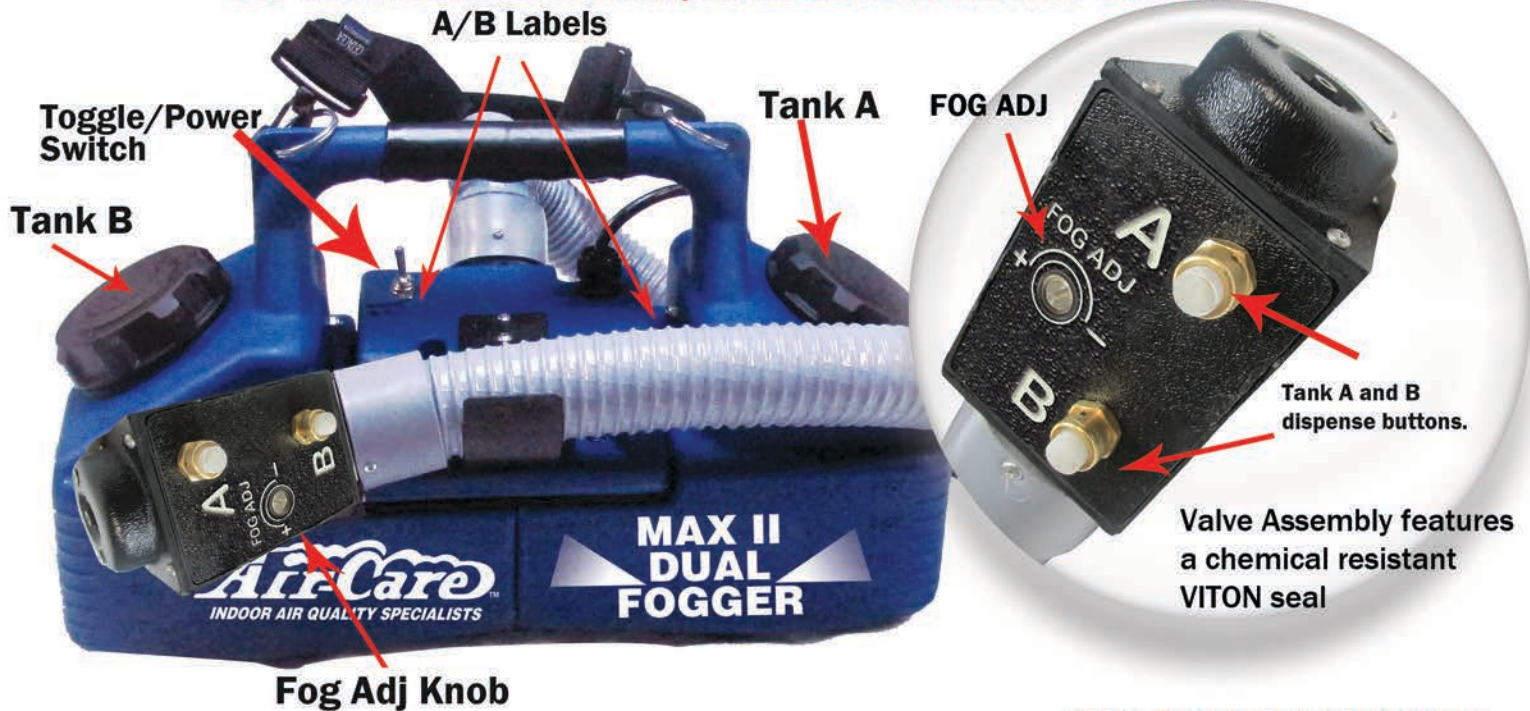

Note: Each tank holds 1 gallon of product, but most jobs only require 1 or 2 quarts of each.

FILL TANKS

1. Remove cap(s) and fill Tanks A/B with desired solution(s).
2. Replace cap(s) securely.

NOTE: The labels for the A and B tanks are located in the blue housing.

TURN ON POWER

3. Plug the fogger into a grounded AC socket and turn on power with the toggle switch and adjust the fog with the FOG ADJ knob while holding one button down. The ADJ knob only adjusts the flow, it is NOT to shut it off.

SPRAY FOG

4. A fine fog can be applied for 10 to 30 seconds and is usually sufficient to coat the air ducts for one supply opening in a residential duct system.

NOTE: If you are dispensing 2 solutions that are compatible, you can press both buttons at the same time. They will mix and fog as one. Check your labels and MSDS sheets for compatibility.

MISCELLANEOUS

5. No fog will be dispensed until one or both buttons are pressed when the motor is turned on.
6. The valves shut off automatically when released.

PRECAUTIONS

Do NOT lay the nozzle on the floor, even with the motor off.
Always turn the motor off when you are finished with the job.

Air-Care
INDOOR AIR QUALITY SPECIALISTS
Air-Care is a Division of D.P.L.
Enterprises, Inc.
3868 E. Post Road.
Las Vegas, NV 89120
www.air-care.com
1(800) 322-9919